


针状焦 制造工序



三菱化学 煤系针状焦

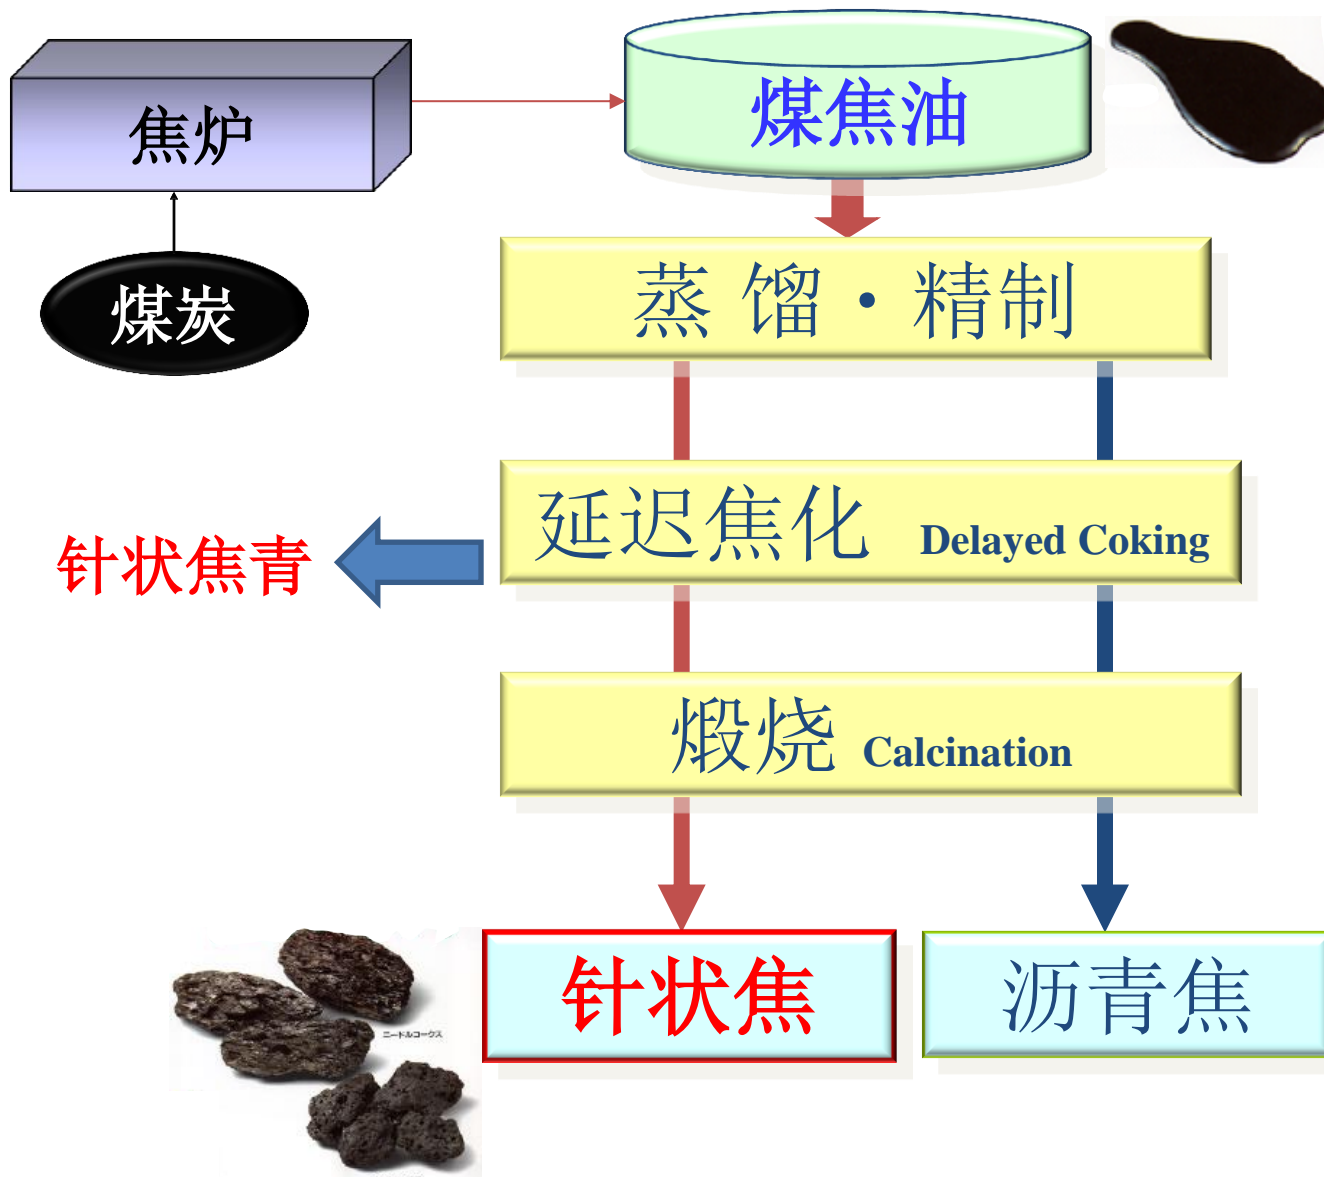

		N-1	N-2	N-3	N-4	油系 针状焦
真比重	g/cm ³	2.14	2.14	2.14	2.08	2.14
水份	%	0.1	0.1	0.1	0.1	0.1
灰份	%	0.01	0.01	0.01	0.04	0.03
挥发份	%	0.28	0.28	0.29	0.29	0.30
硫磺含量	%	0.31	0.31	0.29	0.29	0.44
熱膨張係数CTE	×10 ⁻⁷ /°C	3.4	4.7	4.6	9.3	4.7
長短比(250-425μm)	-	1.87	1.91	1.91	1.5	1.90
粒度						
>5mm	%	46	40	45	53	
<1mm	%	23	28	25	20	


三菱化学 煤系针状焦青




			G-1	G-2	G-3	G-4	油系 针状焦
水份	%		5	5	5	5	(6-10)
灰份	%		0.01	0.01	0.01	0.04	(0.01~ 0.06)
挥发份	%		5.1	5.1	5.0	5.2	(5~8)
硫磺含量	%		0.30	0.30	0.29	0.29	(0.3~0.4)
粒度	>50mm	%	25	27	25	27	-
	<1mm	%	22	21	22	19	-

三菱化学 煤系针状焦青


G-1

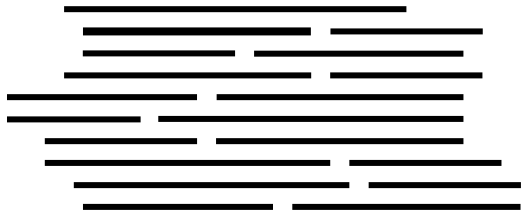

G-2

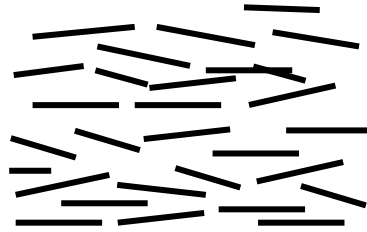

G-3

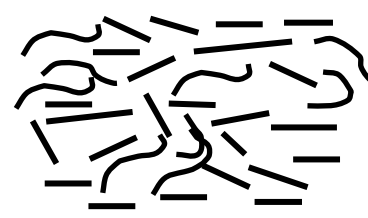

G-4

